



SUZUKI

2-Stroke

Service Bulletin

Subject: FRONT FORK
DAMPER TOOL SET

Bulletin No: Tools- 8
 Date: August 5th, 1977
 Read and Initial
 Manager _____
 Parts _____
 Service _____

NOTICE:

A Front Fork Damper Tool Set is now available from U.S. Suzuki's Parts Department which will aid in assembling and disassembling Suzuki front forks.

The tool set includes a "T" handle wrench and five different attachments. The intended model application of the five attachments is listed below.

DESCRIPTION	PART NUMBER	APPLICATION
Front Fork Tool Set	09940-34511	Includes all items listed below
"T" Handle	09940-34520	-----
Attachment "A"	09940-34530	GT185/250/380/550/750-M, A, B Models GS400/550/750-B Model RE5-M, A Models GT500-A, B Models
Attachment "B"	09940-34540	RM250/370-A Model RM125-M, A Models PE250-B, RL250-L & M Models TS250-L, M, A; TS400-L, M, A, B Models TS100/125/185-L, M Models TC100/125/185-L, M Models
Attachment "C"	09940-34550	TS185-A, B Models; RV125 L, M, B RM100-B Model
Attachment "D"	09940-34560	TS100/125-A, B Models TC100/125/185-A, B Models
Attachment "E"	09940-34570	DS80C RM125-B Model RM250/370-B Model TS250-B Model

DIRECTIONS FOR TOOL USE:


1. Loosen the fork cap bolt located at the top of the inner tube.
2. Drain the fork oil by removing the small cross head screw located at the bottom of the outer fork tube.

(continued)



3. Remove the fork cap bolt located at the top of the inner fork tube, and remove the fork spring.
4. Using the appropriate attachment in conjunction with the "T" handle, secure the top of the damper rod from the inside of the inner fork tube.
5. Using an allen wrench, remove the damper rod securing bolt, located at the bottom of the outer fork tube.
6. Reassemble the front forks by reversing the sequential steps of disassembly.

NOTE: Due to a high demand, certain components of the Front Fork Tool Kit may not be available at this time.

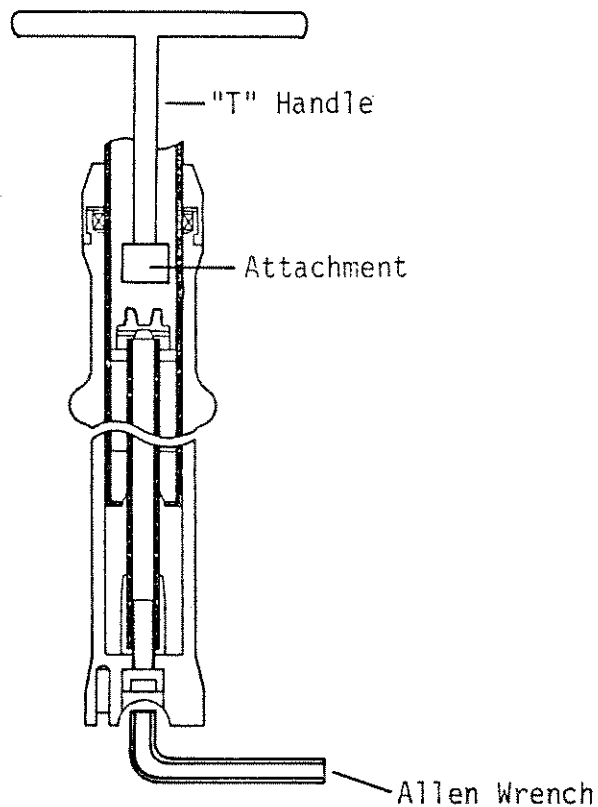

U.S. SUZUKI
TECHNICAL SERVICE DEPARTMENT